






SMTS-202 ON-ON
DPDT 6P

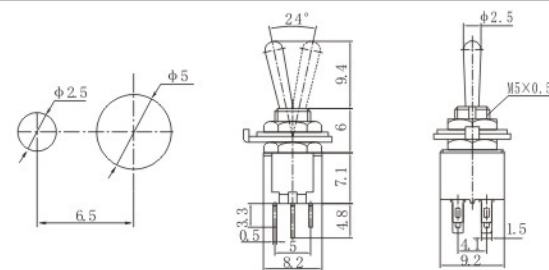


SMTS-102-A2 ON-ON
SPDT 3P

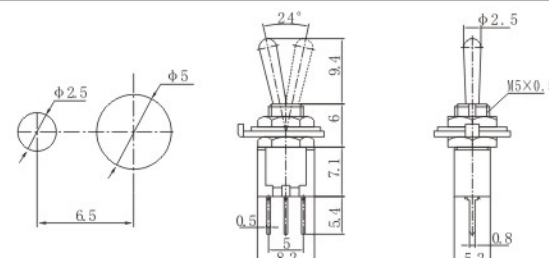


SMTS-202-A2 ON-ON
DPDT 6P

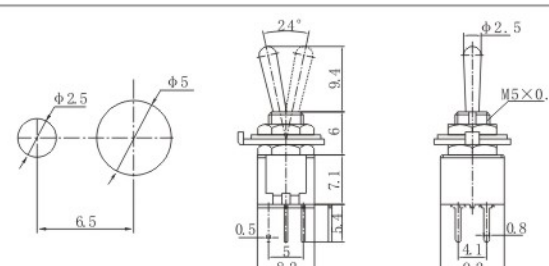


SMTS-103-2A1 ON-OFF-ON
SPDT 3P

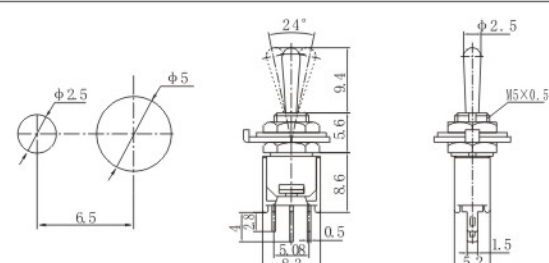

SMTS-203-2A1 ON-OFF-ON
DPDT 6P

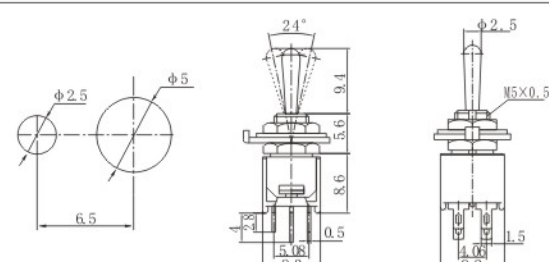

SMTS-102-2C3 ON-ON
SMTS-103-2C3 ON-OFF-ON
SPDT 3P

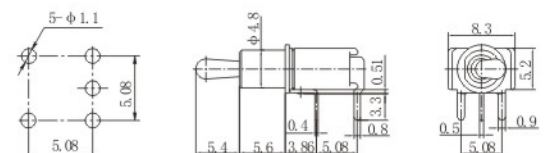

小型钮子开关 Miniature Toggle Switch

技术特性 Specifications

- 规格 Rating: 6A 125VAC; 3A 250VAC
- 接触电阻 Contact Resistance: 20mΩ max
- 绝缘电阻 Insulation Resistance: 500VDC 1000MΩ min
- 耐电压 Dielectric Strength: 1500VAC, 1 Minute
- 操作温度 Operating Temperature: -25℃~ +85℃
- 电气寿命 Electrical Life: ≥10,000 Cycles

选型说明 How to order

MTS - 1 02 - A 1 T - R

小型 Miniature | 刀数 Poles | 电路特性 Switch Function | 手柄种类 Handle options | 端子种类 Terminal options | 支架 Bracket | 底座颜色 Housing color

1 pole, 2 pole, 3 pole, 4 pole

01 ON-OFF, 02 ON-ON, 11 OFF-(ON), 12 ON-(ON)(单复位), 03 ON-OFF-ON, 13 ON-OFF-(ON)(单复位), 23 (ON)-OFF-(ON)(双复位)

() : 回弹指示 Indicates Momentary

防水帽 Water proof cap WPC-05

铭牌 Nameplate


标准 Standard (A), 长型 Long (B), 短型 Short (C), 带柄套 With handle cap (D), 大型 Grand (G), 特大型 Large handle (L), 塑料扁柄 Plastic Flat (E), 金属扁柄 Metal Flat (F), 长金属扁柄 Long Metal Flat (FL)

1/4-40NS, M12×0.75


外形尺寸 Dimension



MTS-101 ON-OFF
MTS-111 OFF-(ON)
SPST 2P

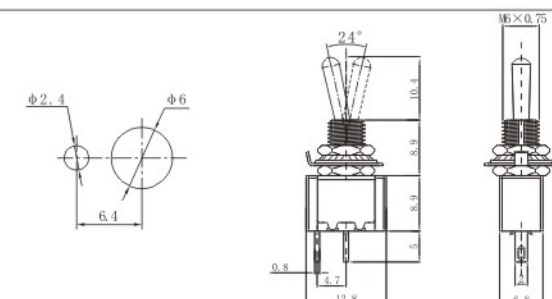


MTS-102 ON-ON
MTS-103 ON-OFF-ON
MTS-112 ON-(ON)
MTS-113 ON-OFF-(ON)
MTS-123 (ON)-OFF-(ON)
SPDT 3P

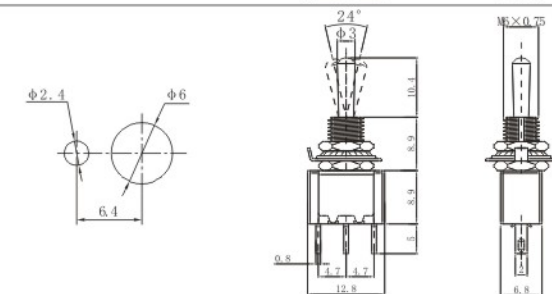





MTS-201 ON-OFF
MTS-211 OFF-(ON)
DPST 4P

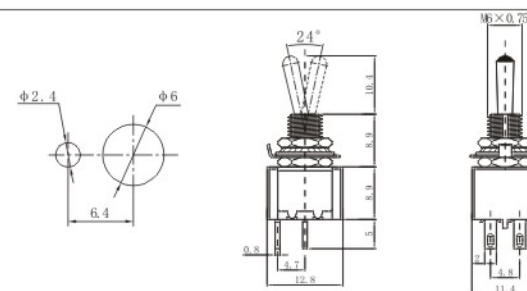


MTS-202 ON-ON
MTS-203 ON-OFF-ON
MTS-212 ON-(ON)
MTS-213 ON-OFF-(ON)
MTS-223 (ON)-OFF-(ON)
DPDT 6P

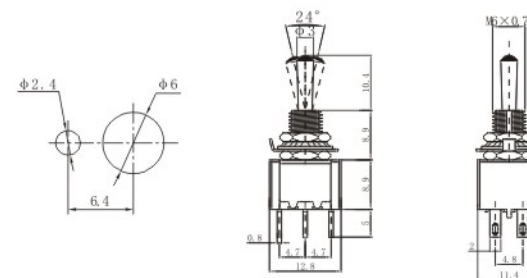


MTS-302 ON-ON
MTS-303 ON-OFF-ON
3PDT 9P

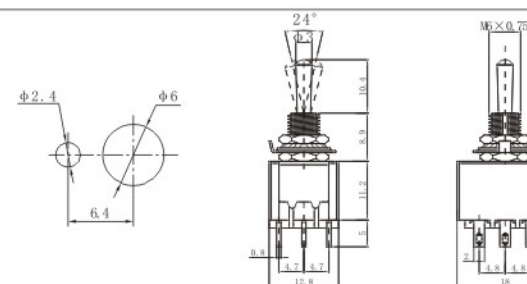


MTS-402 ON-ON
MTS-403 ON-OFF-ON
4PDT 12P

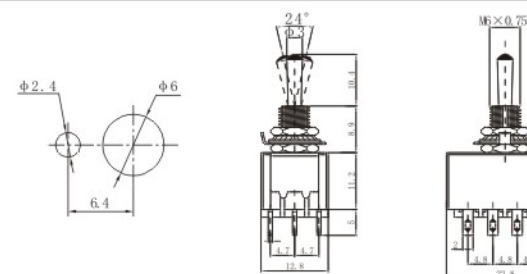


MTS-101-A2 ON-OFF
MTS-111-A2 OFF-(ON)
SPST 2P

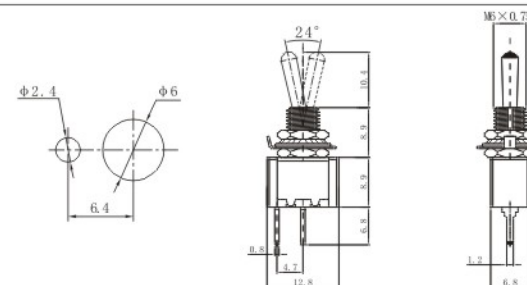


MTS-102-A2 ON-ON
MTS-103-A2 ON-OFF-ON
MTS-112-A2 ON-(ON)
MTS-113-A2 ON-OFF-(ON)
MTS-123-A2 (ON)-OFF-(ON)
SPDT 3P

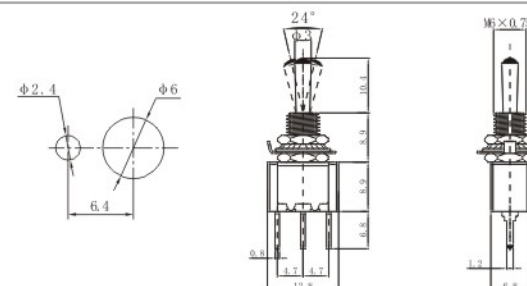


MTS-202-A2 ON-ON
MTS-203-A2 ON-OFF-ON
MTS-212-A2 ON-(ON)
MTS-213-A2 ON-OFF-(ON)
MTS-223-A2 (ON)-OFF-(ON)
DPDT 6P

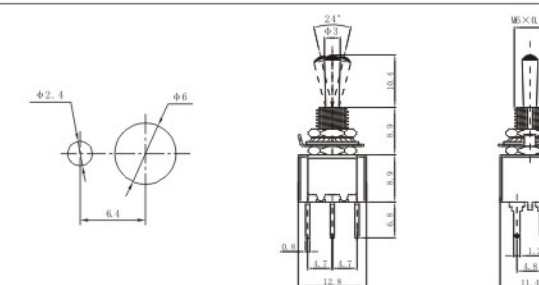


MTS-302-A2 ON-ON
MTS-303-A2 ON-OFF-ON
3PDT 9P

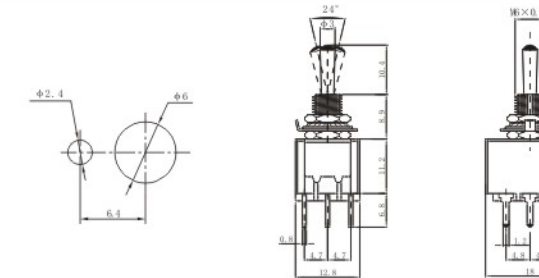


MTS-402-A2 ON-ON
MTS-403-A2 ON-OFF-ON
4PDT 12P

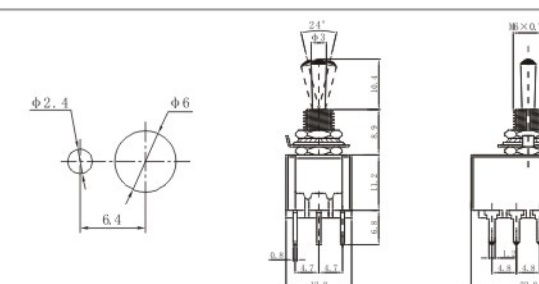


MTS-102-L1 ON-ON
MTS-103-L1 ON-OFF-ON
SPDT 3P

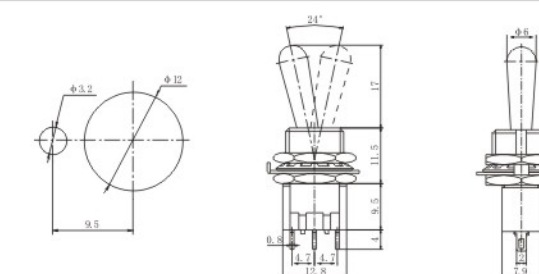

MTS-202-L1 ON-ON
MTS-203-L1 ON-OFF-ON
DPDT 6P

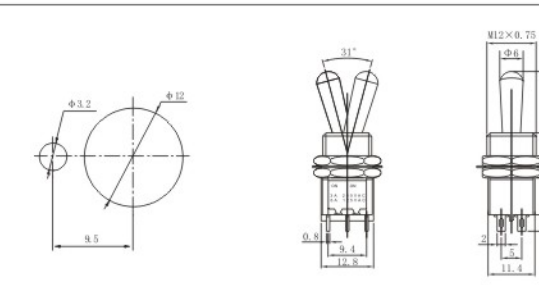


MTS-102-A2T ON-ON
MTS-112-A2T ON-(ON)
MTS-103-A2T ON-OFF-ON
MTS-113-A2T ON-OFF-(ON)
MTS-123-A2T (ON)-OFF-(ON)
SPDT 3P

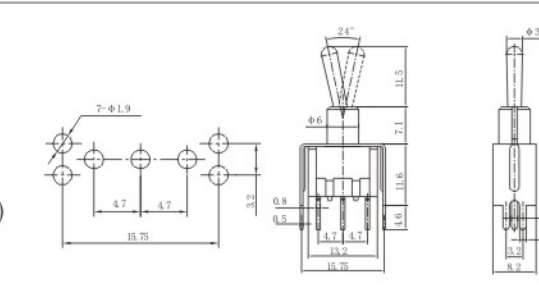





MTS-202-A2T ON-ON
MTS-212-A2T ON-(ON)
MTS-203-A2T ON-OFF-ON
MTS-213-A2T ON-OFF-(ON)
MTS-223-A2T (ON)-OFF-(ON)
DPDT 6P

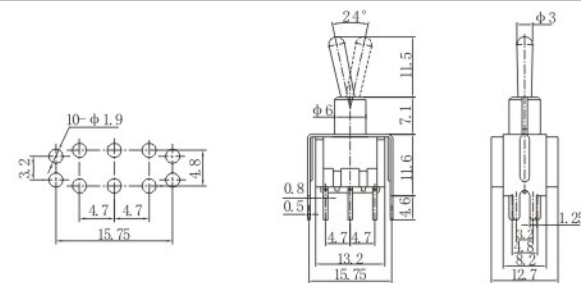


MTS-102-C3 ON-ON
MTS-112-C3 ON-(ON)
MTS-103-C3 ON-OFF-ON
MTS-113-C3 ON-OFF-(ON)
MTS-123-C3 (ON)-OFF-(ON)
SPDT 3P

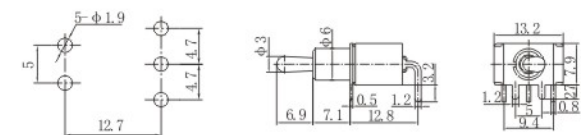


MTS-202-C3 ON-ON
MTS-212-C3 ON-(ON)
MTS-203-C3 ON-OFF-ON
MTS-213-C3 ON-OFF-(ON)
MTS-223-C3 (ON)-OFF-(ON)
DPDT 6P

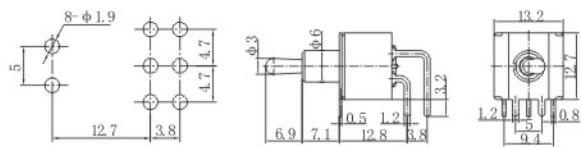


MTS-102-C4 ON-ON
MTS-112-C4 ON-(ON)
MTS-103-C4 ON-OFF-ON
MTS-113-C4 ON-OFF-(ON)
MTS-123-C4 (ON)-OFF-(ON)
SPDT 3P

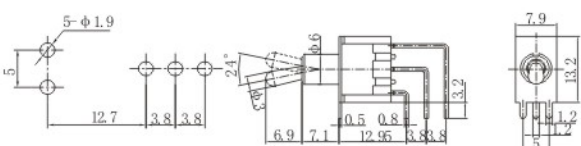


MTS-202-C4 ON-ON
MTS-212-C4 ON-(ON)
MTS-203-C4 ON-OFF-ON
MTS-213-C4 ON-OFF-(ON)
MTS-223-C4 (ON)-OFF-(ON)
DPDT 6P

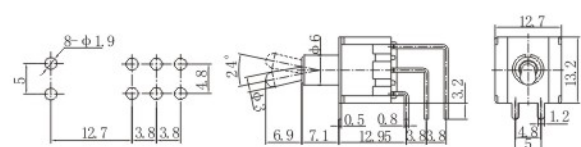


MTS-102-E1 ON-ON
MTS-112-E1 ON-(ON)
MTS-103-E1 ON-OFF-ON
MTS-113-E1 ON-OFF-(ON)
MTS-123-E1 (ON)-OFF-(ON)
SPDT 3P
(PLASTIC FLAT LEVER)

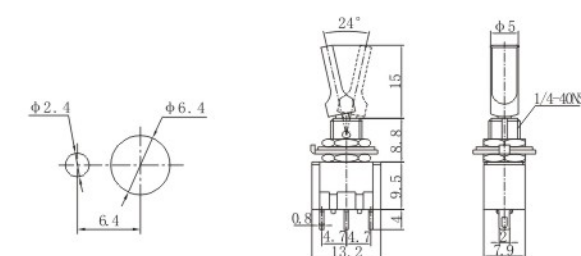


MTS-202-E1 ON-ON
MTS-212-E1 ON-(ON)
MTS-203-E1 ON-OFF-ON
MTS-213-E1 ON-OFF-(ON)
MTS-223-E1 (ON)-OFF-(ON)
DPDT 6P
(PLASTIC FLAT LEVER)

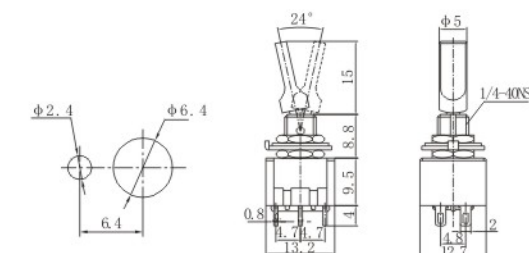


MTS-102-F1 ON-ON
MTS-112-F1 ON-(ON)
MTS-103-F1 ON-OFF-ON
MTS-113-F1 ON-OFF-(ON)
MTS-123-F1 (ON)-OFF-(ON)
SPDT 3P
(METAL FLAT LEVER)

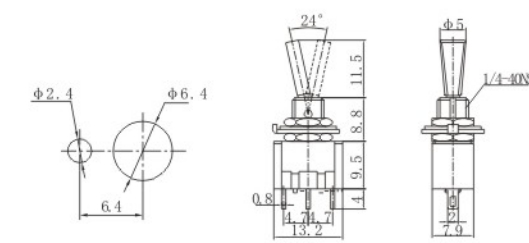


MTS-202-F1 ON-ON
MTS-212-F1 ON-(ON)
MTS-203-F1 ON-OFF-ON
MTS-213-F1 ON-OFF-(ON)
MTS-223-F1 (ON)-OFF-(ON)
DPDT 6P
(METAL FLAT LEVER)

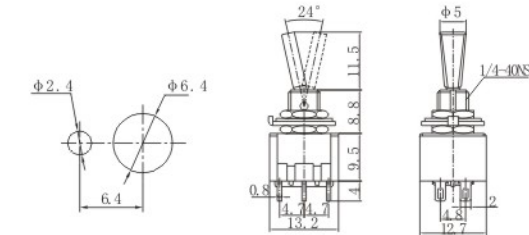

KNX-1-D1 ON-ON
KNX-103-D1 ON-OFF-ON
SPDT 3P

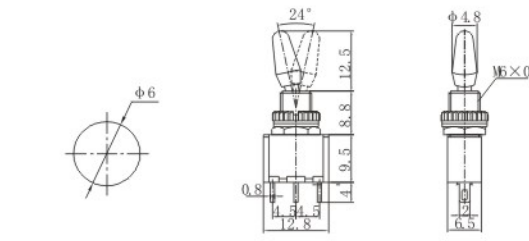

KNX-2-D1 ON-ON
KNX-203-D1 ON-OFF-ON
DPDT 6P

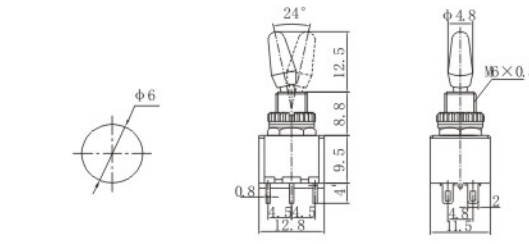

MTS-102-B1 ON-ON
MTS-112-B1 ON-(ON)
SPDT 3P

